


FORD TRUCKS 4143P EURO3

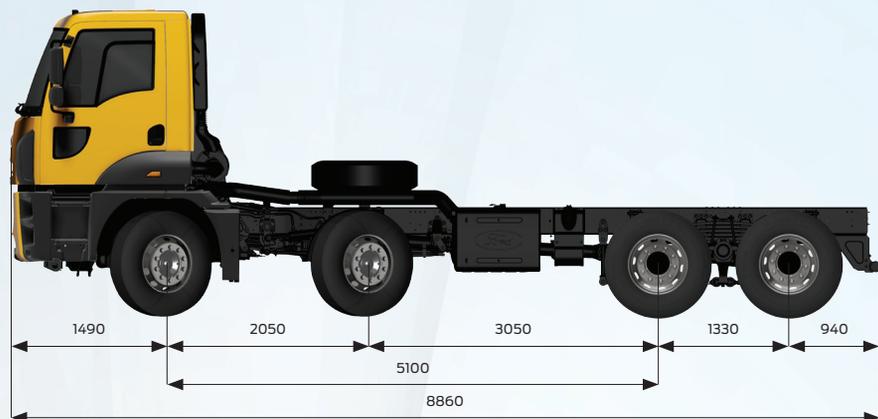

Basic Features

Vehicle Type	Concrete Pump
Axle	8x4
Emission	Euro 3
Cabin Type	Day Cab
Wheelbase (mm)	5100

Engine

Type	Ecotorq 12,7 litres
Displacement (cc)	12740
Bore x Stroke	130 mm x 160 mm
Power	430 PS (316,3 kW) / 1800 rpm
Torque	2150 Nm / 1000-1300 rpm
Compression Ratio	17 +/- 0,5 : 1
Oil Filling Volume	50 L
Coolant Volume	37 L (57 L with Intarder)

Transmission

Clutch	430 mm Single Disc
Manuel Transmission / Ratios (1. gear - 16. gear)	ZF 16S 2230 (13,805-0,836)

Steering

Power Assisted Single Circuit

Chassis

Chassis Thickness	10 mm with Reinforcement
Chassis Strength	500 MPa
Suspension (Front / Rear)	90 mm Parabolic Leaf Springs / 100 mm Parabolic Tandem Suspension
Axle	Hub Reduction
Axle Ratio	4,08
Tyres	315/80 R 22,5
Wheel Rim	22,5 x 9 Steel

Braking System

Brakes (Ø mm x mm Length)	410 x 200, Z-Cam Brake System
Braking System	Dual Brake Circuit - Air Processing Unit with Integrated Oil Separator and Heater
Engine Brake Power	max. 340 kW (Engine Level)
Intarder Power	max. 600 kW / continuous 160 kW

Electrical System

Battery	24 V, 2 x 12 V 180 Ah
Alternator / Starter Motor	130 A / 6,5 kW

Tanks

Fuel Tank	250 L Steel
-----------	-------------



Dimensions (mm)

Front Overhang	1490
Wheelbase	5100
Overall Length	8860
Distance Between 1 st and 2 nd Wheel Centers	2050
Distance Between 2 nd and 3 th Wheel Centers	3050
Distance Between 3 th and 4 th Wheel Centers	1330
Overall Cab Length	1820
Total Vehicle Height	3166
Overall Vehicle Width (Excluding Mirrors)	2540
Chassis Width	770
Rear Overhang	940
Useful Chassis Length	6490
Chassis Height - Front	225
Chassis Height - Rear	285
Ground Clearance - Front	423
Ground Clearance - Rear	300
Turning Radius	11930

Weights (kg)	1. Axle	2. Axle	3. Axle	4. Axle	Total
Technically Permissible Weights	7500	7500	13400	13400	39000
Kerb Weight	3663	3678	1799	1799	10939
Payload	3837	3822	11601	11601	28061

STANDARD EQUIPMENT

- Radio/CD Player
- Air Conditioner
- Cruise Control
- Engine Brake
- Drum Brake
- Electrically Operated Windows
- Electrically Operated and Heated Side Mirrors
- Electrically Operated Headlamp Levelling
- Rake and Reach Adjustable Steering Column
- Heated and Air Suspended Driver Seat
- Lumbar Support
- Manually Operated Sunroof
- Front and Rear Vehicle Antiroll Bar
- Anti-Lock Brake System (ABS)
- Brake Lining Wear Indicator
- Immobilizer
- Single Key with Remote Control and Central Locking
- Home Safe Light
- Approach Light
- Differential Lock
- Switchable Air Compressor for improved Fuel Economy
- Rear Window
- Short Bumper
- Roof Beacon Light
- Tyre Pressure Gauge
- Tinted Glass (70% Transmissibility)
- Headlamp Protection Grilles
- Vertical Exhaust
- Tachometer Simulator Unit (TSU)

OPTIONAL EQUIPMENT

- 6000 mm Wheelbase Version
- Intarder
- Wet Type Cab Heater
- Cooling Pack 2 (Wet Type Heater & Cold Pack Battery)
- Power Cab Tilting
- Engine Driven PTO & Interior Control Unit
- Automatic Traction Control
- Lateral Protection
- Mechanical Tachograph

This leaflet includes products designed for Ford Trucks vehicles. It provides information about the current technical specifications and the standard or optional accessories available as of the date it was issued. Features of standard and optional accessories of the vehicles may be changed from time to time. For this reason, please consult our Authorized Dealers to obtain updated and accurate information on the features of the vehicle you wish to buy. For the aforementioned reason, this leaflet does not constitute an assurance as to the specifications listed herein. The images used in this leaflet may be different from the vehicles on sale. The technical specifications provided herein are for standard vehicles. Selection of any optional accessories might cause differences from these specifications.